

Advanced Video Security in Mini Form Factors for Any Space



Overview

Verkada's Mini Series offers flexible, discreet cameras with exceptional image quality. It includes three indoor models (the CM22, CM42, and CM41-S) and one outdoor model (the CM41-E). These cameras are suitable for a variety of applications, from corporate offices and retail locations to banks and schools.

The CM22 provides essential video security features in a compact form. It is a 3MP camera with 10 meters of IR Range, and includes people and vehicle detection for motion search and trajectory analysis.

The CM42 is a compact and powerful camera that offers many core benefits found in our Dome Series cameras. It surpasses its predecessor in image quality and analytics performance with a cutting-edge Sony IMX675 image sensor, increased storage capacity and advanced Ambarella CV25S88 system on a chip (SOC). It meets EN 50155 railway compliance standards and can be installed for transportation security on trains, buses and boats.

The CM41-E is ideal for outdoor installations and exposure to the elements, thanks to its IK10, IP67 and IP6K9K ratings that provide additional resistance against external impacts and high-pressure water.

The CM41-S is our most compact and flexible camera because its optics and image sensor are separate from the base. This makes it the only high-resolution hybrid cloud camera that can fit in small and narrow places like ATMs, between walls, or in spaces where other cameras with similar capabilities cannot be installed.

All Mini Series cameras come equipped with essential features such as data encryption, onboard storage and advanced motion-based insights. These features enable organizations to easily scale their security coverage and enhance situational awareness across multiple locations. Additionally, the CM42, CM41-E, and CM41-S possess powerful edge-based processing capabilities that offer advanced computer vision functionalities, including Verkada's People and Vehicle Analytics.

Key features

Coverage

- Bring clarity to investigations with 3MP+, high-definition sensor resolutions
- Effortlessly uncover in-scene details with enhanced digital zoom

Storage and processing

- 128GB-2TB of onboard storage
- Powered by an Ambarella chipset to support Verkada's edge-based video analytics
- Low-bandwidth impact, only using 20-50 kbps per camera at rest

Certifications

- IP67 weather rated outdoor models
- IK10 impact rated outdoor models
- IK08 impact rated indoor models
- NDAA compliant



Verkada's hybrid cloud architecture



No NVR or DVRs

Industrial-grade onboard storage saves up to 365 days of continuous video¹

Easy to scale

Bandwidth friendly and supports thousands of cameras across unlimited locations

Centralized management

Modern platform enables secure access on any device from anywhere in the world

The Reliability of Onboard Storage, With the Accessibility of the Cloud

Simple to install

- No NVRs, DVRs, or servers—just a PoE connection
- Cameras come online and configure in minutes
- No added software or complexities like port forwarding

Easy to use

- Centralized management for secure remote access on any device nearly anywhere
- No training required to access footage and features
- Find, download and share footage from any device

Advantages of cloud-managed solution

- Real-time alerts if cameras fall offline
- SAML-based integration with single-sign on (SSO) solutions
- Continuous updates with new AI features
- Instantly share live footage via SMS and email
- Live, proactive alerting based on unusual activity

Ready for scale

- Bandwidth-friendly, operating at just 20–50 kbps
- Scale to thousands of cameras per location
- No added equipment needed to support additional cameras

No hidden costs

- Hardware includes up to a 10-year warranty
- Automatic firmware updates keep systems secure
- New features and enhancements are added at no additional costs




1. All our cameras record in "adaptive quality," capturing both standard and high quality streams. Standard quality (SQ) video is stored up to the amount of retention specified by the customer. The amount of high quality video stored on the camera will depend on the amount of motion detected by the camera over time. To learn more, visit our website: <https://docs.verkada.com/docs/adaptive-quality-recording-whitepaper.pdf>



Verkada Command overview

All-in-one Cloud-based Management Software for Verkada Security Cameras

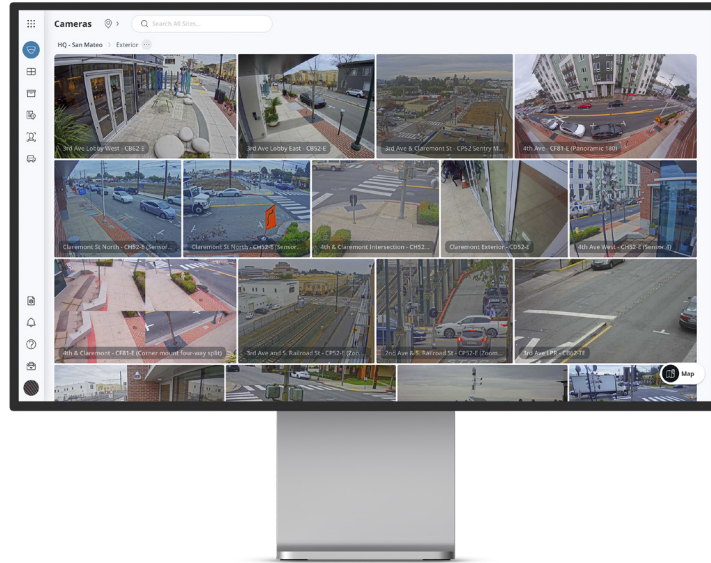

Command, Verkada’s cloud-based management software, is designed to deliver simple access and management for all cameras and users across all sites from virtually anywhere in the world. From Command, users can set up new cameras, create sites, manage settings, access live and archived footage, manage users and access the advanced features powered by Verkada’s edge-based analytics.

Manage from anywhere

- Remotely access footage and manage sites from any supported browser or device
- Native apps for iOS, Android and Verkada’s VX52 Viewing Station
- Receive alerts for offline cameras, tampering and motion detection

Effortlessly archive and share

- Command licenses include unlimited cloud archiving and 30-days of cloud backup
- Easily export any footage in MP4 format and allow recipients to verify its authenticity
- Share Live Links and floorplans with first responders

Scale with simplicity

- Add more devices and sites without complicating the user experience
- Leverage granular roles and permissions to manage users at scale
- Bring cameras online without 3rd party plugins, thick clients or downloads

Stay secure from the ground up

- Stay secure with data encrypted in transit (AES 128) and at rest (AES 256)
- Access cameras securely without port-forwarding, VPNs, or complicated configurations
- Receive automatic firmware updates to stay a step ahead of emerging threats

Quickly detect and respond to threats

- Stay informed with customizable, intelligent alerts
- Speed up investigations with intelligent people and face detection
- Search and filter to find vehicles of interest and detected license plates


Streamline incident management

- Consolidate relevant footage to easily review and annotate
- Share incidents while controlling permissions and retaining audit logs
- Export incidents in a zip file and auto-generate incident reports



Verkada's AI-Powered Search¹

Use Natural Language to Conduct Investigations Directly Relevant to Your Organization

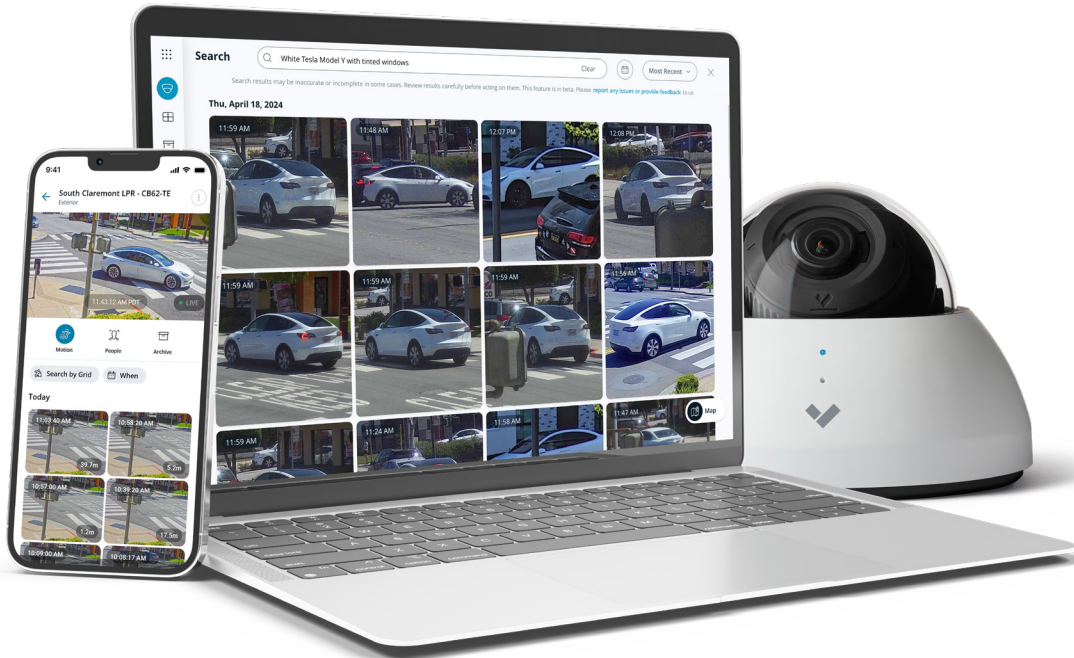

Verkada's latest AI-powered search in Command gives users the ability to search for a near-limitless number of attributes of people and vehicles across their organization. With AI-powered search, users can leverage their own words in a freeform search bar to describe a person or vehicle of interest and conduct highly-granular investigations as a result.

Tap into AI to unlock nearly unlimited search criteria

- A high-performance text-to-image open source AI model and our own in-house enhancements turn the Command search bar into a blank canvas for freeform text queries—allowing users to conduct investigations into specific, granular attributes of people and vehicles.

Structure detailed queries beyond the norm

- Search for specific attributes like articles of clothing, apparel, brands, and more, to drill-down into more granular attributes of people that can make investigations more accurate and streamlined.
- Identify vehicles of interest with detailed criteria like tinted windows, spoilers, bumper stickers, text (like “UPS truck” or “San Mateo School Bus”) and more, to quickly detect vehicles pertinent to one’s investigation.

Conduct investigations that address different industry-specific use cases by time and location²

- Better investigate slip-and-fall cases, shoplifting, break-ins, occupational hazards, workplace safety compliance and more, using freeform queries.
- Organize searches by time and location for added specificity and more relevant insights of people and vehicles.

Take actionable steps once the subject or vehicle of concern is identified

- After identifying a specific person or vehicle, archive the relevant footage and create an incident report.
- Sift through results of people, download their image to add them as a POI or search their face across all of your organization’s cameras for exhaustive analysis of people under investigation.


1. AI-powered search is currently supported in English only.

2. Check out our [User Guide](#) for example queries and methods for constructing your own queries relevant to your organization’s requirements.



Verkada's People and Vehicle Analytics

Simplify Investigations with Intelligent People, Face and Vehicle Detection

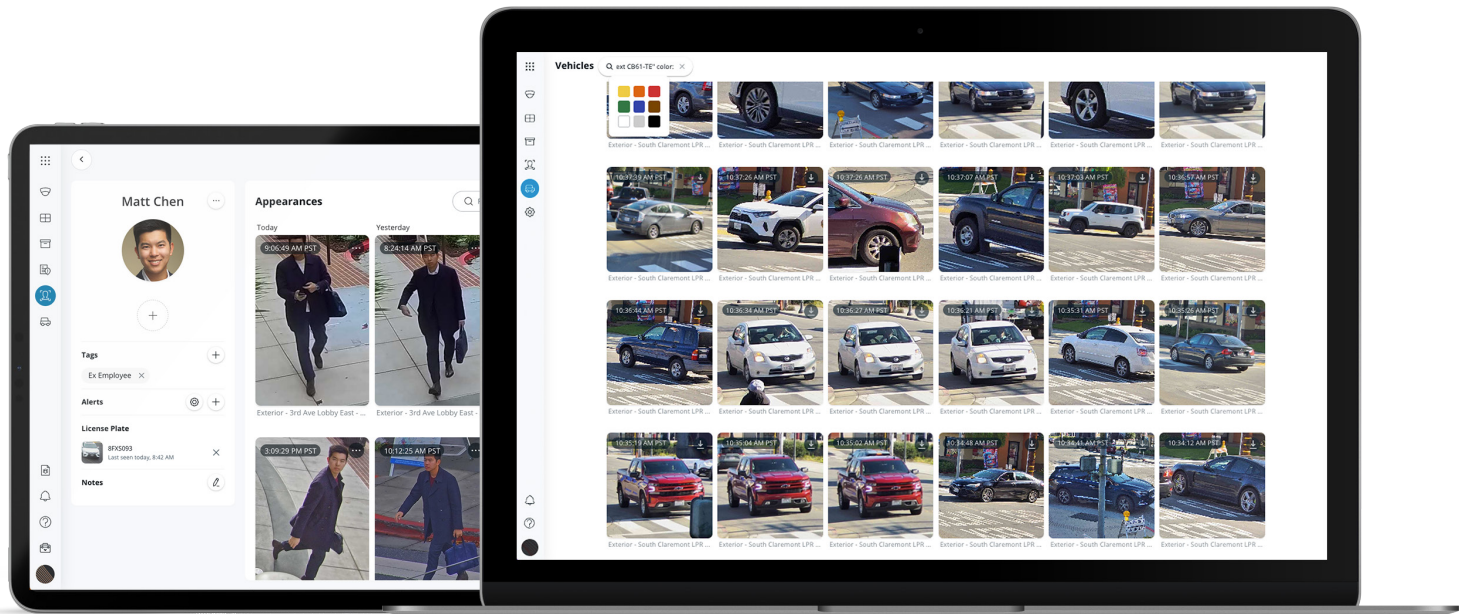

People and Vehicle Analytics combine intelligent edge-based video processing with computer vision to give users high-quality, cloud-based images of all individuals and vehicles identified in the scene. Using these analytics, customers can filter for specific attributes of people or vehicles (like clothing color or vehicle type) on a camera-by-camera basis.

Bring Intelligence to Investigations

Face search

- Quickly search for matching people by selecting an existing face from your organization or by uploading an image

Person and vehicle history

- Browse through high-resolution snapshots of people and vehicles detected
- Save snapshots or easily access associated full-res video
- Search for matched people and vehicles across your entire organization with cross-camera search

Attribute filters

- Drill-down into specific cameras to filter for people and vehicles based on a range of attributes, including clothing or vehicle color, gender appearance, vehicle body type and facial matches

Person and License Plate of Interest notifications

- Create a Person of Interest using an uploaded photo or existing face in Command
- Capture a license plate of interest with our CB52-TE or CB62-TE Bullet cameras
- Set up proactive SMS/email alerts for when a matching face is detected by a camera
- Link License Plates of Interest to a Person of Interest



Mini series model comparison

	CM22	CM42	CM41-E	CM41-S
Type	Indoor Mini Dome	Indoor Mini Dome	Outdoor Mini Dome	Split Mini Dome
Starting price (MSRP)	\$499	\$699	\$999	\$999
Warranty	5 years	10 years	10 years	10 years
Image sensor	3 MP	5 MP	5 MP	5 MP
IR range	10m / 33ft	20m / 66ft	15m / 49ft	N/A
Audio support		✓	✓	
People Analytics				
People detection (motion search, trajectory analysis)	✓	✓	✓	✓
People Analytics (People search, attribute search, face search, Occupancy Trends)		✓	✓	✓
Vehicle Analytics				
Vehicle Detection (Motion search, trajectory analysis)	✓	✓	✓	✓
Vehicle Analytics (vehicle search, attribute search, Occupancy Trends)		✓	✓	✓



Mini Series camera Tech Specs



CM22

Camera features

Image Sensor	1/2.8" Progressive CMOS	Shutter Speed	1/30 sec. to 1/10,000 sec.
Sensor Resolution¹	3MP (2048 x 1536)	Day/Night	IR-cut filter for day and night function
Lens Type	Fixed	IR Cut Filter	Yes
Focal Length	2.8mm	IR Range	10m / 33ft
Aperture	F1.6	Minimum Illumination	0.009 lux @ F1.9 (Color) 0 lux with IR Illuminators on
Iris	Fixed	Onboard Storage	Capacity: From 256GB to 768GB Card: MicroSD, SDXC
Field of View (after LDC²)	Horizontal: 95° (79°) Vertical: 69° (62°) Diagonal: 130° (96°)	CPU	Ambarella CV25S88
Sensor Movement	Tilt: 60° Pan: 350° Rotation: 180°		

Standard video settings

Compression	H.265, H.264	Historical Video Settings	Adaptive quality ¹
Frame Rate³	24fps	Live Streaming Settings	High quality (HQ): Up to 3,000 Kbps (default) Standard quality (SQ): Up to 600 Kbps
WDR Technology	104 dB dynamic range, true WDR, dual exposure		

Standard audio settings

Audio	Not supported
--------------	---------------

Power and network

Power Input⁴	With IR: IEEE 802.3af Type 1 PoE Without IR: IEEE 802.3af Type 1 PoE Extended temperature range: N/A	Connectivity	RJ-45 cable connector for network/PoE connection; 10 / 100 / 1000 Mbps
Power Consumption⁴	With IR: 37-57V, 0.165-0.107A, 6.12W Without IR: 37-57V, 0.086-0.056A, 3.21W Extended temperature range: N/A	RTSP	RTSP 1.0 RFC 2326 Max concurrent streams: 2 Audio support: No

1. All our cameras record in "adaptive quality," capturing both standard (SQ) and high quality (HQ) streams. SQ video is stored up to the amount of retention specified by the customer. The amount of HQ video stored on the camera will depend on the amount of motion detected by the camera over time. To learn more, visit our website: <https://docs.verkada.com/docs/adaptive-quality-recording-whitepaper.pdf>

2. Lens Distortion Correction (LDC) crops the sensor field of view to deliver a rectified, undistorted output image.

3. Frame rate can be adjusted by support.

4. Extended temperature range includes operating temperatures below -8.5°C / 16.7°F and assumes IR will be enabled.



Mini Series camera Tech Specs



CM22

General

Operating Temperature	-10°C to 50°C / 14°F to 122°F	LED Indicator	System power and status indicator
Humidity	0 to 90%	Warranty	5 Years
Certifications	FCC, ICES, RCM, VCCI, CE, UKCA, EN 50155 railway compliance, UL/cUL/IEC 62368-1, NOM	Included Accessories	Setup guide, T10 security torx screwdriver, 3x wingnuts, 3x washers, 3x TP4.0 mount screws, 3x M4 wall screws, 3x wall anchors

Mechanical

Weight	Camera: 290g / 10.23oz Mount plate: 98g / 3.46oz	Body	Aluminum, plastic dome trim
Dimensions	Ø: 124.5mm / 4.9in, H: 71.5mm / 2.8in		

Software capabilities

Alerts	Camera status, motion detection, people detection, vehicle detection, crowd detection, line-crossing detection, loitering detection	Streaming and Storage	Cloud backup, configurable retention days, selectable storage location, low bandwidth mode, timelapse, RTSP
People Analytics	Motion search, trajectory analysis	Sharing and Privacy	Live Links, live face blur, privacy regions, audit log
Vehicle Analytics	Motion search, trajectory analysis		



Mini Series camera Tech Specs



CM42

Camera features

Image Sensor	1/2.8" Progressive CMOS	Shutter Speed	1/30 sec. to 1/10,000 sec.
Sensor Resolution¹	5MP (2592 x 1944)	Day/Night	IR-cut filter for day and night function
Lens Type	Fixed	IR Cut Filter	Yes
Focal Length	2.8mm	IR Range	20m / 66ft
Aperture	F1.6	Minimum Illumination	0.009 lux @ F1.9 (Color) 0 lux with IR Illuminators on
Iris	Fixed	Onboard Storage	Capacity: From 256GB to 2TB Card: MicroSD, SDXC
Field of View (after LDC²)	Horizontal: 95° (79°) Vertical: 69° (62°) Diagonal: 130° (96°)	CPU	Ambarella CV25S88
Sensor Movement	Tilt: 60° Pan: 350° Rotation: 180°		

Standard video settings

Compression	H.265, H.264	Historical Video Settings	Adaptive quality ¹
Frame Rate³	24fps	Live Streaming Settings	High quality (HQ): Up to 3,000 Kbps (default) Standard quality (SQ): Up to 600 Kbps
WDR Technology	104 dB dynamic range, true WDR, dual exposure		

Standard audio settings

Audio	Supported	Interface	Built-in microphone
Audio Capacity	One-way audio	Effective Range	5m / 15ft

Power and network

Power Input⁴	With IR: IEEE 802.3af Type 1 PoE Without IR: IEEE 802.3af Type 1 PoE Extended temperature range: N/A	Connectivity	RJ-45 cable connector for network/PoE connection; 10 / 100 / 1000 Mbps
Power Consumption⁴	With IR: 37-57V, 0.165-0.107A, 6.12W Without IR: 37-57V, 0.086-0.056A, 3.21W Extended temperature range: N/A	RTSP	RTSP 1.0 RFC 2326 Max concurrent streams: 2 Audio support: Yes

1. All our cameras record in "adaptive quality," capturing both standard (SQ) and high quality (HQ) streams. SQ video is stored up to the amount of retention specified by the customer. The amount of HQ video stored on the camera will depend on the amount of motion detected by the camera over time. To learn more, visit our website: <https://docs.verkada.com/docs/adaptive-quality-recording-whitepaper.pdf>

2. Lens Distortion Correction (LDC) crops the sensor field of view to deliver a rectified, undistorted output image.

3. Frame rate can be adjusted by support.

4. Extended temperature range includes operating temperatures below -8.5°C / 16.7°F and assumes IR will be enabled.



Mini Series camera Tech Specs



CM42

General

Operating Temperature	-10°C to 50°C / 14°F to 122°F	LED Indicator	System power and status indicator
Humidity	0 to 90%	Warranty	10 Years
Certifications	FCC, ICES, RCM, VCCI, CE, UKCA, EN 50155 railway compliance, UL/cUL/IEC 62368-1, NOM, IK08 impact rating	Included Accessories	Setup guide, T10 security torx screwdriver, 3x wingnuts, 3x washers, 3x TP4.0 mount screws, 3x M4 wall screws, 3x wall anchors

Mechanical

Weight	Camera: 290g / 10.23oz Mount plate: 98g / 3.46oz	Body	Aluminum, plastic dome trim
Dimensions	Ø: 124.5mm / 4.9in, H: 71.5mm / 2.8in		

Software capabilities

Alerts	Camera status, motion detection, people detection, vehicle detection, Person of Interest detection, crowd detection, line-crossing detection, loitering detection	Streaming and Storage	Cloud backup, configurable retention days, selectable storage location, low bandwidth mode, timelapse, RTSP
People Analytics	People search, attribute search, face search, Occupancy Trends, motion search, trajectory analysis, selective face blurring, AI-powered search ⁵	Sharing and Privacy	Live Links, live face blur, privacy regions, audit log
Vehicle Analytics	Vehicle search, attribute search, motion search, trajectory analysis, Occupancy Trends, AI-powered search ⁵		

5. AI-powered search is currently supported in English only.



Mini Series camera Tech Specs



CM41-E

Camera features

Image Sensor	1/2.8" Progressive CMOS	Shutter Speed	1/30 sec. to 1/10,000 sec.
Sensor Resolution¹	5MP (2688 x 1944)	Day/Night	IR-cut filter for day and night function
Lens Type	Fixed	IR Cut Filter	Yes
Focal Length	2.8mm	IR Range	15m / 49ft
Aperture	F1.6	Minimum Illumination	0.009 lux @ F1.9 (Color) 0 lux with IR Illuminators on
Iris	Fixed	Onboard Storage	Capacity: From 128GB to 2TB Card: MicroSD, SDXC
Field of View (after LDC²)	Horizontal: 97° (78°) Vertical: 71° (63°) Diagonal: 128° (91°)	CPU	Ambarella S5L63
Sensor Movement	Tilt: 70° Pan: 355° Rotation: 240°		

Standard video settings

Compression	H.265, H.264	Historical Video Settings	Adaptive quality ¹
Frame Rate³	24fps	Live Streaming Settings	High quality (HQ): 1,000 - 4,500 Kbps (1,500 Kbps default) Standard quality (SQ): 600 Kbps

Standard audio settings

Audio	Supported	Interface	Built-in microphone
Audio Capacity	One-way audio	Effective Range	5m / 15ft

Power and network

Power Input⁴	With IR: IEEE 802.3af Type 1 PoE Without IR: IEEE 802.3af Type 1 PoE Extended temperature range: IEEE 802.3af Type 1 PoE	Connectivity	RJ-45 cable connector for network/PoE connection; 10/100 Mbps
Power Consumption⁴	With IR: 37-57V, 0.14-0.09A, 5.46W Without IR: 37-57V, 0.08-0.05A, 3.22W Extended temperature range: 37-57V, 0.27-0.17A, 10.1W	RTSP	RTSP 1.0 RFC 2326 Max concurrent streams: 2 Audio support: Yes

1. All our cameras record in "adaptive quality," capturing both standard (SQ) and high quality (HQ) streams. SQ video is stored up to the amount of retention specified by the customer. The amount of HQ video stored on the camera will depend on the amount of motion detected by the camera over time. To learn more, visit our website: <https://docs.verkada.com/docs/adaptive-quality-recording-whitepaper.pdf>

2. Lens Distortion Correction (LDC) crops the sensor field of view to deliver a rectified, undistorted output image.

3. Frame rate can be adjusted by support.

4. Extended temperature range includes operating temperatures below -8.5°C / 16.7°F and assumes IR will be enabled.



Mini Series camera Tech Specs



CM41-E

General

Operating Temperature	-40°C to 55°C / -40°F to 131°F	LED Indicator	System power and status indicator
Humidity	0 to 90%	Warranty	10 Years
Certifications	FCC, ICES, CE, UL, CB, BIS, NOM, VCCI, IP67 weather rating, IP6K9K, IK10 impact rating, IEC 60950, IEC 62368, NDAA, EN 50155 railway compliance, EN 45545 railway fire compliance, EN 50121 railway EMC compliance	Included Accessories	Setup guide, T10 security torx screwdriver, wall mount screws (3x), junction box screws (2x), mounting template, desiccant bags, cable sealing components

Mechanical

Weight	Camera: 401g / 14.14oz Mount plate: 138g / 4.87oz	Body	Aluminum, plastic dome trim
Dimensions	Ø: 121mm / 4.78in, H: 72mm / 2.83in		

Software capabilities

Alerts	Camera status, motion detection, people detection, vehicle detection, Person of Interest detection, crowd detection	Streaming and Storage	Cloud backup, configurable retention days, selectable storage location, low bandwidth mode, timelapse, RTSP
People Analytics	People search, attribute search, face search, Occupancy Trends, motion search, trajectory analysis, selective face blurring, AI-powered search ⁵	Sharing and Privacy	Live link, privacy regions, audit log
Vehicle Analytics	Vehicle search, attribute search, motion search, AI-powered search ⁵		

5. AI-powered search is currently supported in English only.



Mini Series camera Tech Specs



CM41-S

Camera features

Image Sensor	1/2.8" Progressive CMOS	Shutter Speed	1/30 sec. to 1/10,000 sec.
Sensor Resolution¹	5MP (2688 x 1944)	Day/Night	IR-cut filter for day and night function
Lens Type	Fixed	IR Cut Filter	Yes
Focal Length	2.8mm	IR Range	N/A
Aperture	F1.6	Minimum Illumination	0.009 lux @ F1.9 (Color) 0 lux with IR Illuminators on
Iris	Fixed	Onboard Storage	Capacity: From 128GB to 384GB Card: MicroSD, SDXC
Field of View (after LDC²)	Horizontal: 97° (78°) Vertical: 71° (63°) Diagonal: 128° (91°)	CPU	Ambarella S5L63
Sensor Movement	Tilt: 90° Pan: N/A Rotation: 240°		

Standard video settings

Compression	H.265, H.264	Historical Video Settings	Adaptive quality ¹
Frame Rate³	24fps	Live Streaming Settings	High quality (HQ): Up to 3,000 Kbps (default) Standard quality (SQ): Up to 600 Kbps

Standard audio settings

Audio	Not Supported
--------------	---------------

Power and network

Power Input⁴	With IR: N/A Without IR: IEEE 802.3af Type 1 PoE Extended temperature range: N/A	Connectivity	RJ-45 cable connector for network/PoE connection; 10/100 Mbps
Power Consumption⁴	With IR: N/A Without IR: 37-57V, 0.1-0.06A, 3.55W Extended temperature range: N/A	RTSP	RTSP 1.0 RFC 2326 Max concurrent streams: 2 Audio support: No

1. All our cameras record in "adaptive quality," capturing both standard (SQ) and high quality (HQ) streams. SQ video is stored up to the amount of retention specified by the customer. The amount of HQ video stored on the camera will depend on the amount of motion detected by the camera over time. To learn more, visit our website: <https://docs.verkada.com/docs/adaptive-quality-recording-whitepaper.pdf>

2. Lens Distortion Correction (LDC) crops the sensor field of view to deliver a rectified, undistorted output image.

3. Frame rate can be adjusted by support.

4. Extended temperature range includes operating temperatures below -8.5°C / 16.7°F and assumes IR will be enabled.



Mini Series camera Tech Specs



CM41-S

General

Operating Temperature	-10°C to 50°C / 14°F to 122°F	LED Indicator	System power and status indicator
Humidity	0 to 90%	Warranty	10 Years
Certifications	FCC, ICES, CE, UL, CB, NOM	Included Accessories	Setup guide, mounting template, camera mounting screws (2x), hub mounting screws (2x)

Mechanical

Weight	Camera: 199g / 7.02oz Mount plate: 55g / 1.94oz	Body	Aluminum, plastic housing
Dimensions	Camera Head: H: 47.90mm / 1.89in, W: 55.22mm / 2.17in, D: 35.22mm / 1.39in Base: Ø: 94.18mm / 3.70in, H: 27.64mm / 1.09in		

Software capabilities

Alerts	Camera status, motion detection, people detection, vehicle detection, Person of Interest detection, crowd detection	Streaming and Storage	Cloud backup, configurable retention days, selectable storage location, low bandwidth mode, timelapse, RTSP
People Analytics	People search, attribute search, face search, Occupancy Trends, motion search, trajectory analysis, selective face blurring, AI-powered search ⁵	Sharing and Privacy	Live Link, privacy regions, audit log
Vehicle Analytics	Vehicle search, attribute search, motion search, AI-powered search ⁵		

5. AI-powered search is currently supported in English only.



Professional video monitoring Stop Crimes in Progress

Verkada's professional video monitoring solution enables organizations to detect and respond to threats as they happen, using only their cameras.



Turn your cameras into a monitored alarm system

Professional video monitoring allows organizations to turn their Verkada cameras into a complete, monitored alarm solution - no extra hardware required. Simply select which cameras should be monitored, set an arm/disarm schedule and choose how monitoring agents should respond to a threat, such as remote talk down or notifying police.

How it works

Detect unusual activity

- Choose which cameras should be monitored and when. An alarm is triggered if a person is detected while the system is armed.
- Other Verkada devices, including intrusion sensors, access control and environmental sensors, can also be configured as alarm triggers.

Assess the threat

- Monitoring agents immediately review camera footage to determine if a person is actually present.*
- Video-verification helps to ensure priority police response and screens out false alarms.

Take action

- If there is a person present, the monitoring agent will immediately notify your call list.
- Agents can also request emergency dispatch or talk down to intruders through an on-site speaker.
- If there is not a person present, the agent will dismiss the incident.

Key benefits



Detect intruders before they enter your building

Protect your perimeter with cameras that can detect intruders the minute they set foot on your property.



No alarm panel or sensors needed

Use cameras as intrusion sensors and get all the benefits of a monitored alarm system without any extra hardware.



Cut back on expensive in-person guards

Cameras detect intruders and agents can take action, reducing the need for live guards patrolling or watching cameras.



Help get priority police response

Video-verified alarms help the police know that they should respond quickly and helps you avoid false alarm fines.



Take action against intruders immediately

In addition to notifying law enforcement, our agents can talk down to intruders through a powerful speaker to scare them off.

*Professional monitoring with video verification is included in the LIC-BA Standard Alarm License or the LIC-BV Premium Alarm License. One License is required per location, and includes up to 50 monitored cameras. Monitoring is provided by fully redundant, US-based, UL-listed central monitoring stations with Five Diamond Certification from The Monitoring Association. Certified monitoring centers are also available in Canada, the UK and Australia.



Ordering Information

Mini Series pricing

Model Number	MP ¹	WDR	Lens	IR Range	Onboard Storage	Maximum SQ Onboard Retention ¹	People/ Vehicle Analytics	Cost (MSRP) ^{USD}
CM22-256-HW	3.0MP	✓	Fixed	10m / 33ft	256GB	30 Days	-	\$499
CM22-512-HW	3.0MP	✓	Fixed	10m / 33ft	512GB	60 Days	-	\$899
CM22-768-HW	3.0MP	✓	Fixed	10m / 33ft	768GB	90 Days	-	\$1,299
CM42-256-HW	5.0MP	✓	Fixed	20m / 66ft	256GB	30 Days	✓	\$699
CM42-512-HW	5.0MP	✓	Fixed	20m / 66ft	512GB	60 Days	✓	\$1,099
CM42-768-HW	5.0MP	✓	Fixed	20m / 66ft	768GB	90 Days	✓	\$1,499
CM42-1TB-HW	5.0MP	✓	Fixed	20m / 66ft	1TB	120 Days	✓	\$1,899
CM42-2TB-HW	5.0MP	✓	Fixed	20m / 66ft	2TB	365 Days	✓	\$3,199
CM41-30S-HW	5.0MP	✓	Fixed	-	128GB	30 Days	✓	\$999
CM41-90S-HW	5.0MP	✓	Fixed	-	384GB	90 Days	✓	\$1,799
CM41-30E-HW	5.0MP	✓	Fixed	15m / 49ft	128GB	30 Days	✓	\$999
CM41-60E-HW	5.0MP	✓	Fixed	15m / 49ft	256GB	60 Days	✓	\$1,399
CM41-90E-HW	5.0MP	✓	Fixed	15m / 49ft	512GB	90 Days	✓	\$1,799
CM41-365E-HW	5.0MP	✓	Fixed	15m / 49ft	2TB	365 Days	✓	\$3,199

1. All our cameras record in "adaptive quality," capturing both standard and high quality streams. Standard quality (SQ) video is stored up to the amount of retention specified by the customer. The amount of high quality video stored on the camera will depend on the amount of motion detected by the camera over time. To learn more, visit our website: <https://docs.verkada.com/docs/adaptive-quality-recording-whitepaper.pdf>



Ordering Information

Video Security Cloud License pricing

Model Number	Description	Cost (MSRP) USD
LIC-CAM-1Y	1-Year Camera License	\$199
LIC-CAM-3Y	3-Year Camera License	\$549
LIC-CAM-5Y	5-Year Camera License	\$899
LIC-CAM-10Y	10-Year Camera License	\$1,799

Accessories pricing

ACC-MNT-MPEND-1	Mini Camera Pendant Cap Mount	\$79
ACC-MNT-MJBOX-1	Mini Camera Junction Box Mount	\$79
INJ-POE-PLUS	PoE Plus (802.3at) Injector, GigE	\$129
ACC-MNT-CLIP-1	Tile Clip Mount	\$99
ACC-MNT-SJBOX-1	Square Junction Box Mount ¹	\$89

Viewing Station pricing

VX52-HW	VX52 Viewing Station	\$499
LIC-VX-1Y	1-Year Viewing Station License	\$499
LIC-VX-3Y	3-Year Viewing Station License	\$1,299
LIC-VX-5Y	5-Year Viewing Station License	\$1,999
LIC-VX-10Y	10-Year Viewing Station License	\$3,999

1. Note: to mount Mini cameras with the ACC-MNT-SJBOX-1, one would need to pair it with the ACC-MNT-MJBOX-1.